


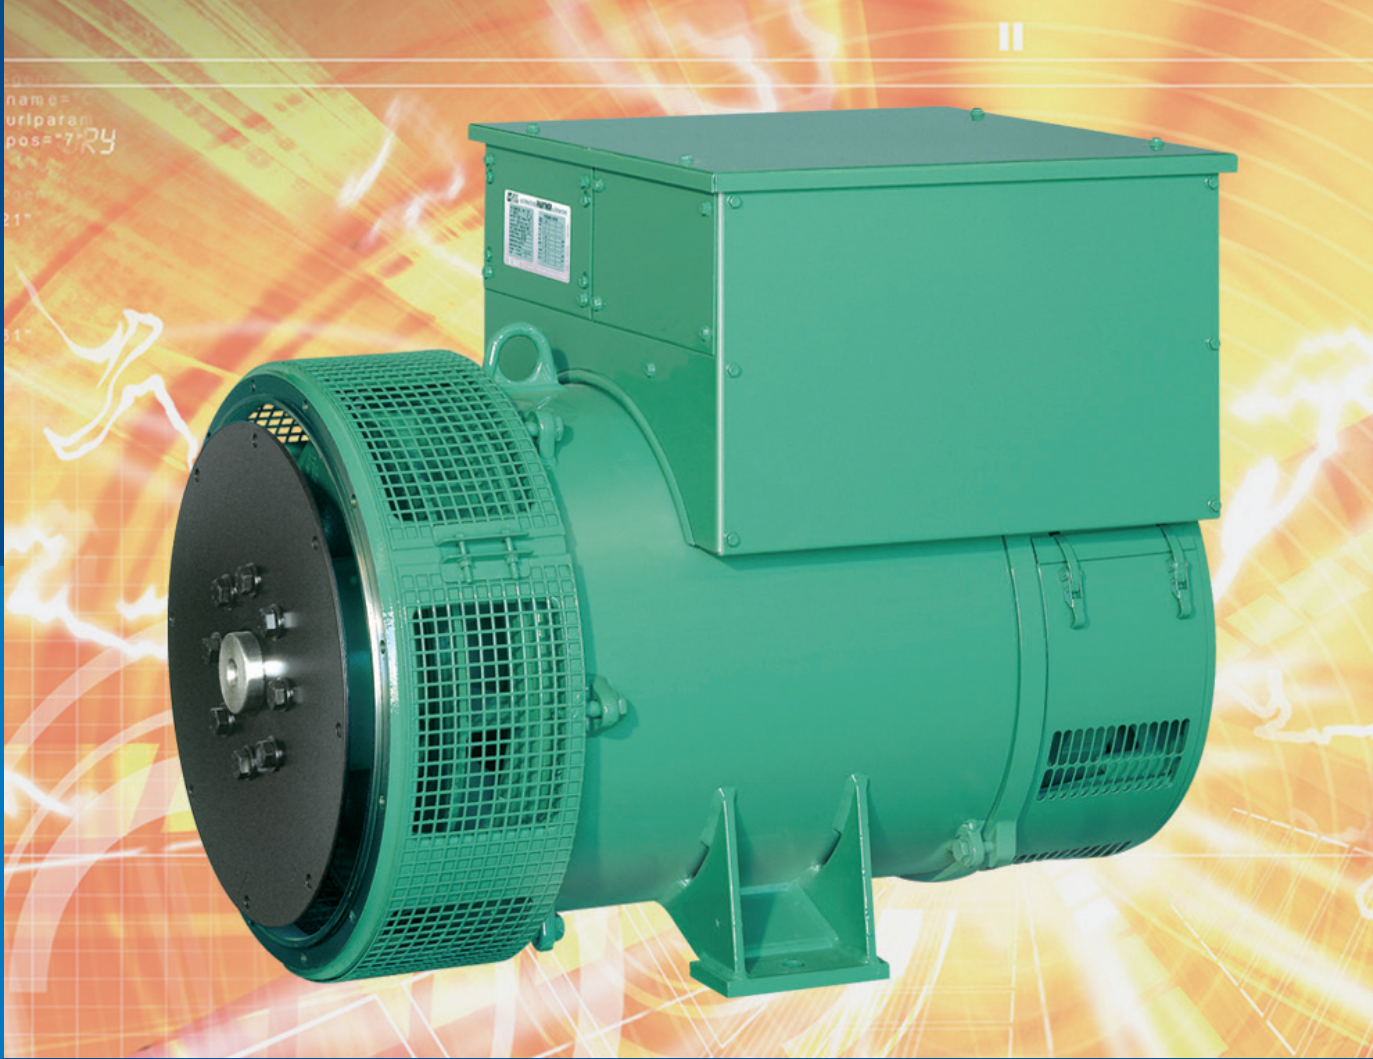

Low Voltage Alternators - 4 pole

LSA 46.2

180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz
Electrical and mechanical data

Leroy-Somer™


EMERSON™
Industrial Automation

Low Voltage Alternators - 4 pole

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

Specially adapted to applications

The LSA 46.2 alternator is designed to be suitable for typical generator applications, such as: backup, marine applications, rental, telecommunications, etc.

Compliant with international standards

The LSA 46.2 alternator conforms to the main international standards and regulations:

- IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA / UL 1446 (UL 1004 on request), marine regulations, etc.

It can be integrated into a CE marked generator.

The LSA 46.2 is designed, manufactured and marketed in an ISO 9001 and ISO 14001 environment.

Top of the range electrical performance

- Class H insulation.
- Standard 12-wire re-connectable winding, 2/3 pitch, type no. 6.
- Voltage range 50 Hz: 220 V - 240 V and 380 V - 415 V (440 V).
- Voltage range 60 Hz: 208 V - 240 V and 380 V - 480 V.
- High efficiency and motor starting capacity.
- Other voltages are possible with optional adapted windings:
 - 50 Hz: 440 V (no. 7), 500 V (no. 9), 550 V (no. 22), 600 V (no. 23), 690 V (no. 10 or 52).
 - 60 Hz: 380 V and 416 V (no. 8), 600 V (no. 9).
- R 791 interference suppression conforming to standard EN 55011 group 1 class B standard for European zone (CE marking).

Excitation and regulation system suited to the application

Excitation system				Regulation options				
Volage regulator	SHUNT	AREP	PMG	Current transformer for paralleling	Mains paralleling	3-phase sensing	3-phase sensing for mains paralleling unbalanced	Remote voltage potentiometer
R250	Std	-	-	-	-	-	-	√
R450	Option	Std	Std	C.T.	R726	R731	R734	√
D510C	Option	Option	Option	C.T.	included	included	contact factory	√

√ : possible mounting

Protection system suited to the environment

- The LSA 46.2 is IP 23.
- Standard winding protection for clean environments with relative humidity $\leq 95\%$, including indoor marine environments.
Options :
 - Filters on air inlet : derating 5%.
 - Filters on air inlet and air outlet (IP 44) : derating 10%.
 - Winding protections for harsh environments and relative humidity greater than 95%.
 - Space heaters.
 - Thermal protection for winding and shields.

Reinforced mechanical structure using finite element modelling

- Compact and rigid assembly to better withstand generator vibrations.
- Steel frame.
- Cast iron flanges and shields.
- Twin-bearing and single-bearing versions designed to be suitable for engines on the market.
- Half-key balancing.
- Sealed for life ball bearings, regreasable bearings (optional).

Accessible terminal box proportioned for optional equipment

- Easy access to the voltage regulator and to the connections.
- Possible inclusion of accessories for paralleling, protection and measurement.
- 12-way terminal block for voltage reconnection.

Low Voltage Alternators - 4 pole

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

General characteristics

Insulation class	H	Excitation system	SHUNT	AREP or PMG
Winding pitch	2/3 (N° 6)	AVR type	R 250	R 450
Number of wires	12	Voltage regulation (*)	± 0.5 %	± 0.5 %
Protection	IP 23	Short-circuit current	-	300% (3 IN) : 10s
Altitude	≤ 1000 m	Totale Harmonic distortion THD (**)	no load < 2.5% - on load < 2.5%	
Overspeed	2250 min ⁻¹	Waveform: NEMA = TIF (**)	< 50	
Air flow	0.43 m³/s (50Hz) / 0.51 (60Hz)			

(*) Steady state. (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings 50 Hz - 1500 R.P.M.

kVA / kW - P.F. = 0.8																								
Duty/T°C		Continuous duty/40°C						Continuous duty/40°C						Stand-by/40°C					Stand-by/27°C					
Class/T°K		H/125°K						F/105°K						H/150°K					H/163°K					
Phase		3 ph.			1 ph.			3 ph.			1 ph.			3 ph.			1 ph.		3 ph.			1 ph.		
Y		380V	400V	415V	440V	ΔΔ	380V	400V	415V	440V	ΔΔ	380V	400V	415V	440V	ΔΔ	380V	400V	415V	440V	ΔΔ			
Δ		220V	230V	240V		230V	220V	230V	240V		230V	220V	230V	240V		230V	220V	230V	240V		230V			
YY					220V					220V					220V					220V				
46.2 M3	kVA	180	180	180	160	104	168	168	168	146	97	195	195	195	175	110	203	203	203	180	114			
	kW	144	144	144	128	83	134	134	134	116	78	156	156	156	140	88	162	162	162	144	91			
46.2 M5	kVA	200	200	200	175	116	184	184	184	160	108	214	214	214	190	123	223	223	223	200	127			
	kW	160	160	160	140	93	147	147	147	128	86	171	171	171	152	98	178	178	178	160	102			
46.2 L6	kVA	250	250	240	205	141	217	217	217	190	131	254	260	254	225	150	266	275	266	237	156			
	kW	200	200	192	164	113	174	174	174	152	105	203	208	203	180	120	213	220	213	190	125			
46.2 L9	kVA	280	280	280	215	154	250	250	250	195	142	290	290	290	240	165	300	300	300	250	170			
	kW	224	224	224	172	123	200	200	200	156	114	232	232	232	192	132	240	240	240	200	136			
46.2 VL12	kVA	315	315	300	260	187	276	276	260	230	170	327	327	310	285	200	341	341	325	300	208			
	kW	252	252	240	208	150	221	221	208	184	136	262	262	248	228	160	273	273	260	240	166			






Ratings 60 Hz - 1800 R.P.M.

kVA / kW - P.F. = 0.8																							
Duty/T°C		Continuous duty/40°C						Continuous duty/40°C						Stand-by/40°C					Stand-by/27°C				
Class/T°K		H/125°K						F/105°K						H/150°K					H/163°K				
Phase		3 ph.			1 ph.			3 ph.			1 ph.			3 ph.			1 ph.		3 ph.			1 ph.	
Y		380V	416V	440V	480V	ΔΔ	380V	416V	440V	480V	ΔΔ	380V	416V	440V	480V	ΔΔ	380V	416V	440V	480V	ΔΔ		
Δ		220V	240V		240V		220V	240V		240V		220V	240V		240V		220V	240V		240V			
YY			208V	220V	240V			208V	220V	240V			208V	220V	240V			208V	220V	240V			
46.2 M3	kVA	192	205	220	228	128	177	189	198	210	119	203	219	228	244	136	211	225	237	255	141		
	kW	154	164	176	182	102	142	151	158	168	95	162	175	182	195	109	169	180	190	204	113		
46.2 M5	kVA	205	219	230	250	136	190	203	211	225	126	219	235	245	262	145	227	242	252	273	151		
	kW	164	175	184	200	109	152	162	169	180	101	175	188	196	210	116	182	194	202	218	121		
46.2 L6	kVA	257	276	289	300	173	239	255	265	278	160	276	295	308	324	184	285	304	317	337	192		
	kW	206	221	231	240	138	191	204	212	222	128	221	236	246	259	147	228	243	254	270	154		
46.2 L9	kVA	296	316	328	344	197	273	291	302	302	182	313	338	351	357	209	326	348	366	375	220		
	kW	237	253	262	275	158	218	233	242	242	146	250	270	281	286	167	261	278	293	300	176		
46.2 VL12	kVA	333	357	372	381	220	309	329	341	347	200	359	383	397	412	235	370	399	415	429	243		
	kW	266	286	298	305	176	247	263	273	278	160	287	306	318	330	188	296	319	332	343	194		

Low Voltage Alternators - 4 pole

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

Efficiencies 400 V - 50 Hz (P.F.: 1) (P.F.: 0.8)

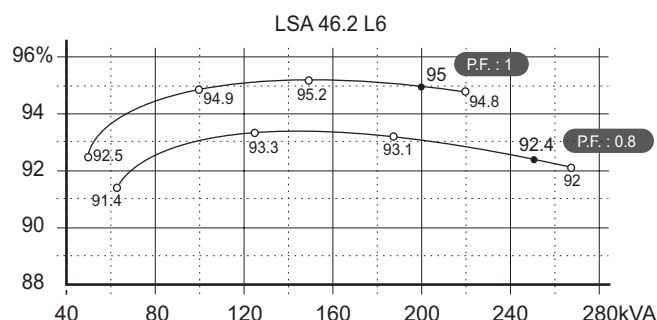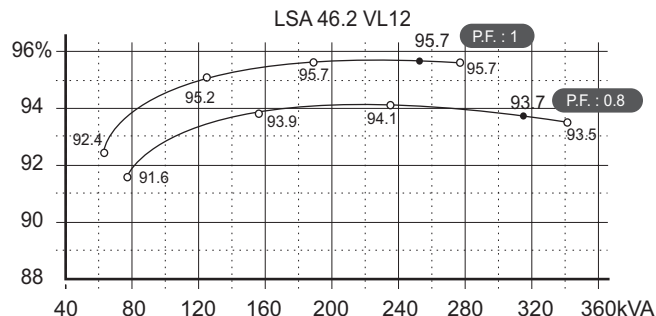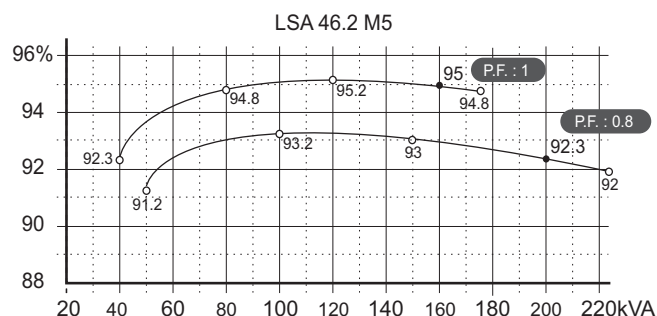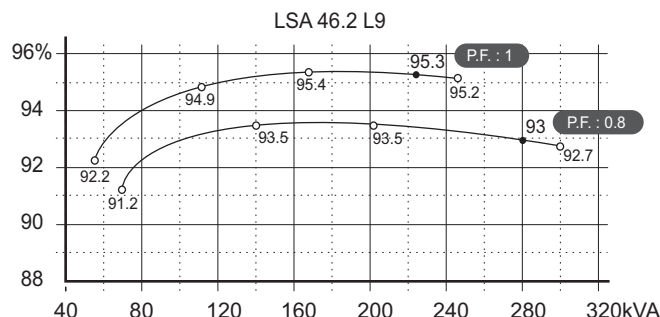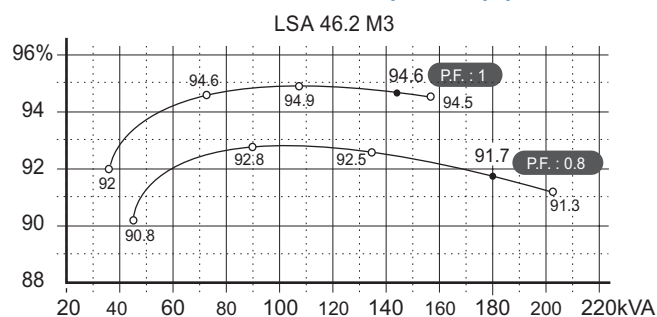

Reactances (%). Time constants (ms) - Class H / 400 V

		M3	M5	L6	L9	VL12
Kcc	Short-circuit ratio	0.44	0.45	0.41	0.48	0.5
Xd	Direct-axis synchro. reactance unsaturated	312	301	327	294	273
Xq	Quadrature-axis synchro. reactance unsaturated	187	180	196	176	164
T'do	No-load transient time constant	1971	2042	2105	2175	2253
X'd	Direct-axis transient reactance saturated	15.8	14.7	15.5	13.5	12.1
T'd	Short-circuit transient time constant	100	100	100	100	100
X''d	Direct-axis subtransient reactance saturated	9.5	8.8	9.3	8.1	7.2
T''d	Subtransient time constant	10	10	10	10	10
X''q	Quadrature-axis subtransient reactance saturated	11.8	10.9	11.5	10	8.9
Xo	Zero sequence reactance unsaturated	0.5	0.8	0.7	0.7	0.5
X2	Negative sequence reactance saturated	10.6	9.9	10.4	9.1	8.1
Ta	Armature time constant	15	15	15	15	15

Other class H/400 V data


io (A)	No-load excitation current (SHUNT/AREP or PMG)	1	1	1	1.1	1
ic (A)	On-load excitation current (SHUNT/AREP or PMG)	3.9	3.7	4	3.9	3.4
uc (V)	On-load excitation voltage (SHUNT/AREP or PMG)	33	32	34	33	33
ms	Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500
kVA	Start ($\Delta U = 20\%$ cont. or 50% trans.) SHUNT	340	397	462	538	694
kVA	Start ($\Delta U = 20\%$ cont. or 50% trans.) AREP	371	434	504	583	760
%	Transient ΔU (on-load 4/4) SHUNT - P.F.: 0.8 _{LAG}	16.2	15.4	15.9	14.6	12.9
%	Transient ΔU (on-load 4/4) AREP - P.F.: 0.8 _{LAG}	14.3	13.7	14.1	13	11.4
W	No-load losses	2810	3040	3690	4340	4800
W	Heat dissipation	12900	13180	16400	16810	16730

Low Voltage Alternators - 4 pole


LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

Transient voltage variation 400V - 50 Hz


Load application (SHUNT excitation)

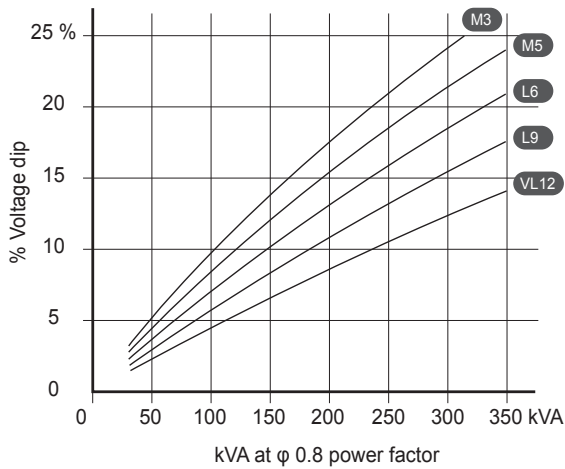


Load application (AREP or PMG excitation)

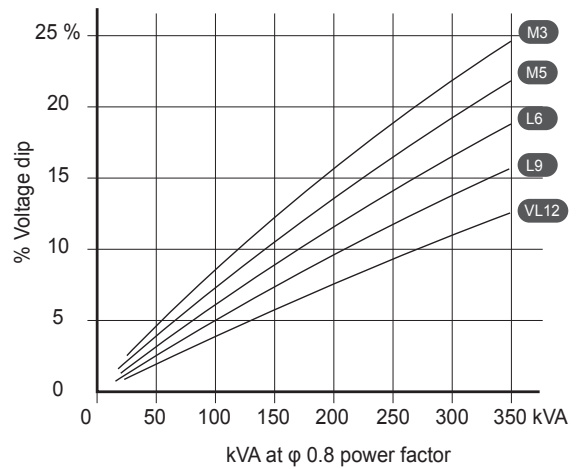


Load rejection (SHUNT excitation)

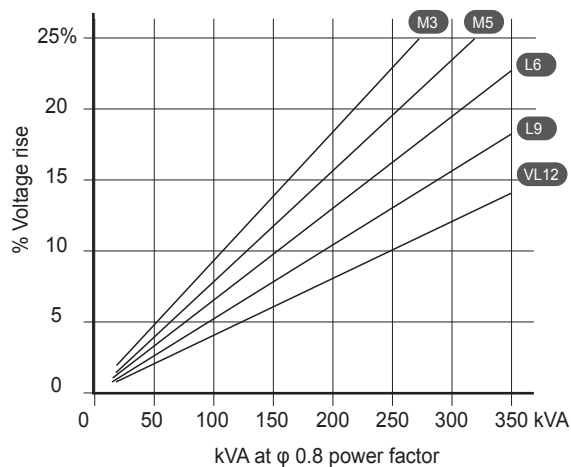


Load rejection (AREP or PMG excitation)

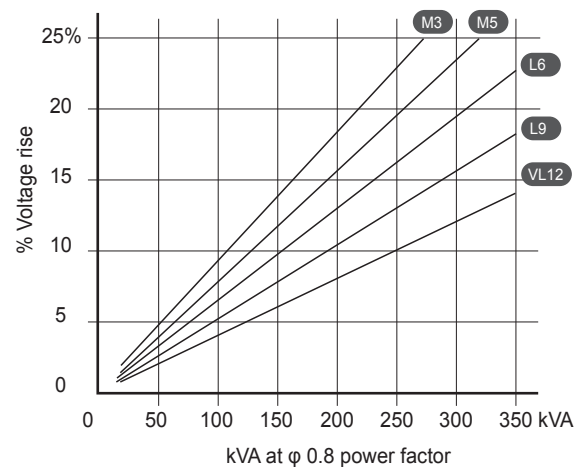

Motor starting (SHUNT excitation)

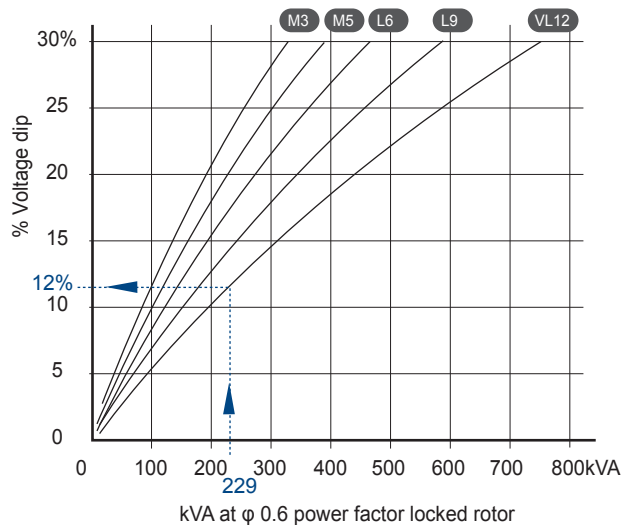

Motor starting (AREP or PMG excitation)

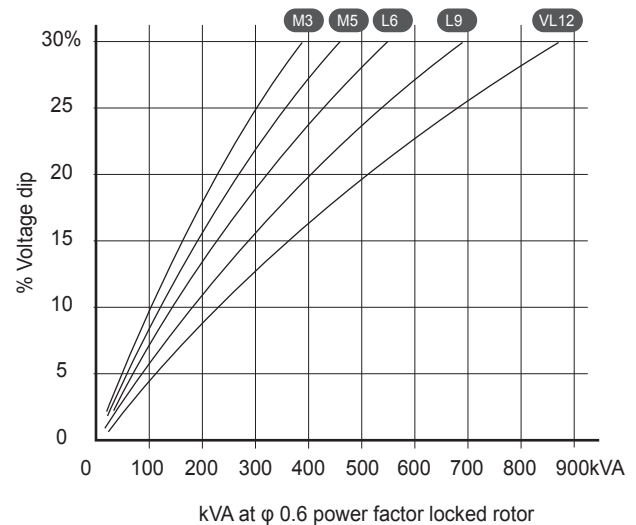

1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$

Calculation example for a different P.F. other than 0.6: Starter motor kVA calculated at 0.4 P.F. = 200 kVA






➤ $\text{Sin P.F. } 0.4 = 0.9165$ ➤ $K = 1.145$ ➤ $\text{kVA corrected} = 229 \text{ kVA}$ ➤ $\text{Voltage dip corresponding to VL12} = 12\%$.

2) For voltages other than 400V (Y), 230V (Δ) at 50 Hz, then kVA must be multiplied by $(400/U)^2$ or $(230/U)^2$.

Low Voltage Alternators - 4 pole

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

Efficiencies 480 V - 60 Hz (P.F.: 1) (P.F.: 0.8)

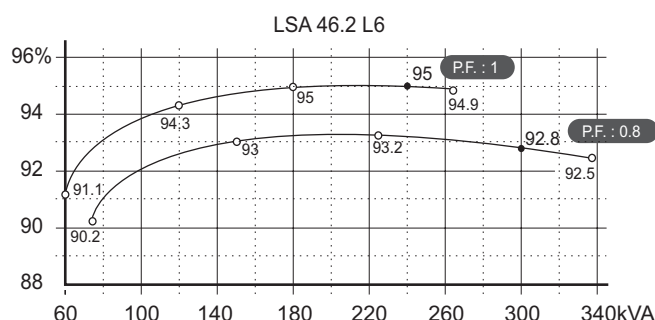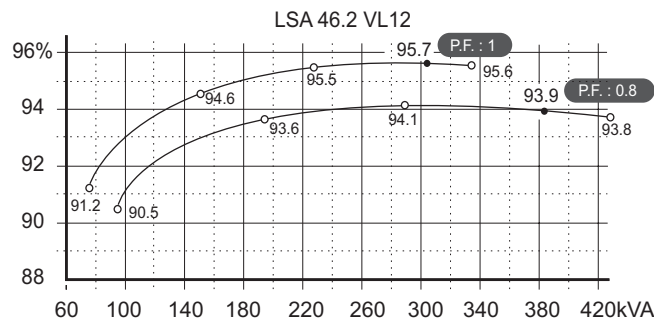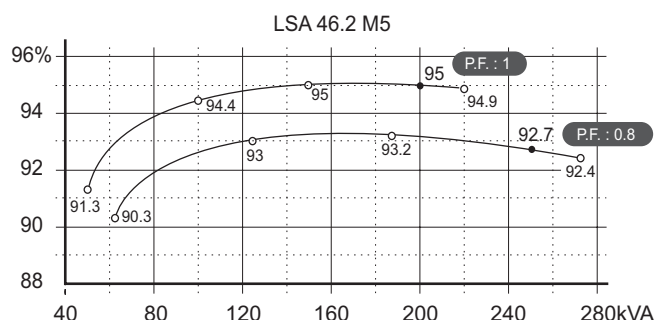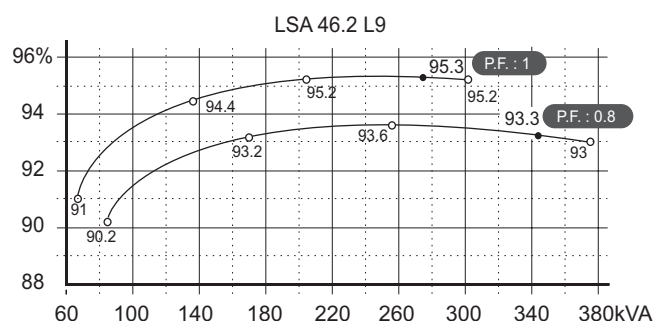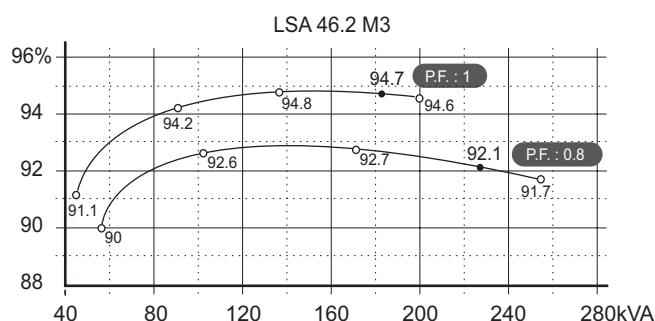

Reactances (%). Time constants (ms) - Class H / 480 V

	M3	M5	L6	L9	VL12
Kcc Short-circuit ratio	0.41	0.43	0.41	0.47	0.5
Xd Direct-axis synchro. reactance unsaturated	329	314	327	300	275
Xq Quadrature-axis synchro. reactance unsaturated	197	188	196	180	165
T'do No-load transient time constant	1971	2042	2105	2175	2253
X'd Direct-axis transient reactance saturated	16.7	15.3	15.5	13.8	12.2
T'd Short-circuit transient time constant	100	100	100	100	100
X''d Direct-axis subtransient reactance saturated	10	9.2	9.3	8.2	7.3
T''d Subtransient time constant	10	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	12.4	11.4	11.5	10.2	9
Xo Zero sequence reactance unsaturated	0.5	0.5	0.6	0.4	0.4
X2 Negative sequence reactance saturated	11.2	10.3	10.4	9.3	8.2
Ta Armature time constant	15	15	15	15	15

Other class H/480 V data


io (A) No-load excitation current (SHUNT/AREP or PMG)	1	1	1	1.1	1
ic (A) On-load excitation current (SHUNT/AREP or PMG)	4	3.8	3.9	3.8	3.4
uc (V) On-load excitation voltage (SHUNT/AREP or PMG)	34	32	33	33	33
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500
kVA Start ($\Delta U = 20\%$ cont. or 50% trans.) SHUNT	420	496	575	673	867
kVA Start ($\Delta U = 20\%$ cont. or 50% trans.) AREP	461	540	629	732	953
% Transient ΔU (on-load 4/4) SHUNT - P.F.: 0.8 _{LAG}	16.7	15.8	15.9	14.8	13
% Transient ΔU (on-load 4/4) AREP - P.F.: 0.8 _{LAG}	14.8	14.1	14.1	13.1	11.5
W No-load losses	4180	4500	5530	6430	7090
W Heat dissipation	15570	15680	18500	19690	19510

Low Voltage Alternators - 4 pole


LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

Transient voltage variation 480V - 60 Hz


Load application (SHUNT excitation)

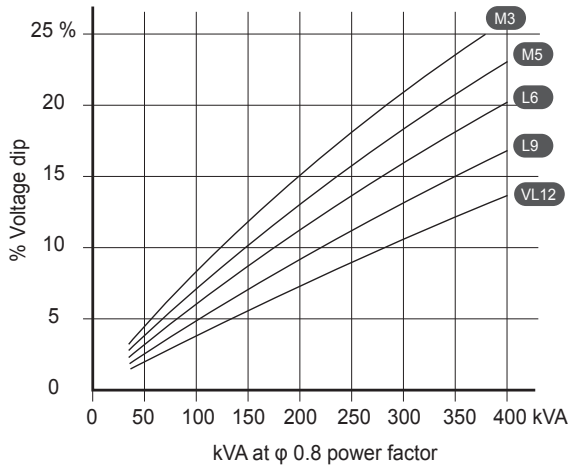


Load application (AREP or PMG excitation)

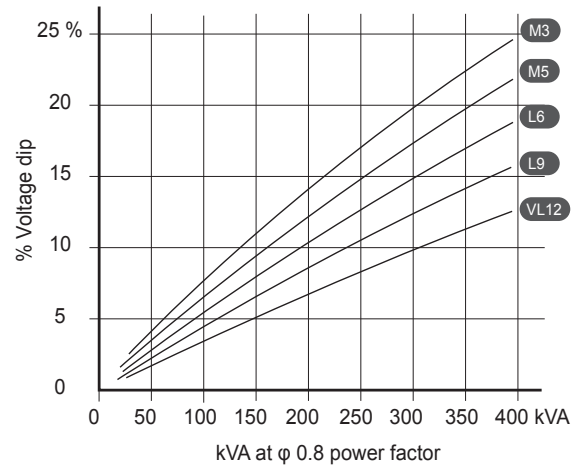


Load rejection (SHUNT excitation)

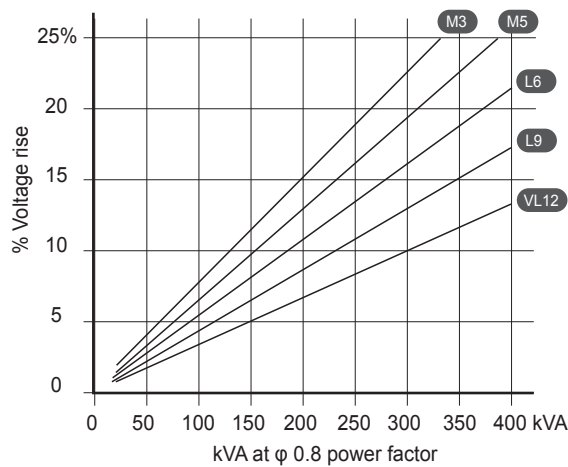


Load rejection (AREP or PMG excitation)

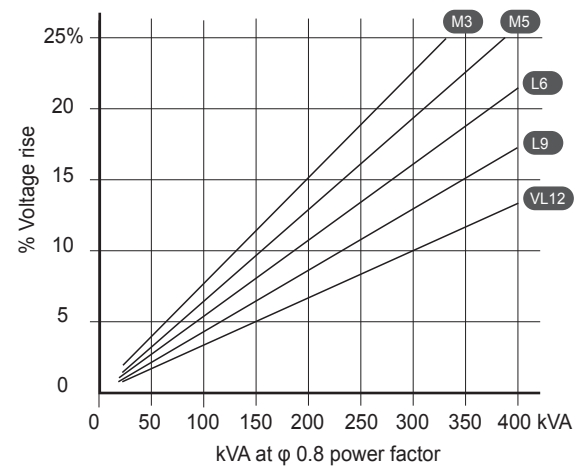

Motor starting (SHUNT excitation)

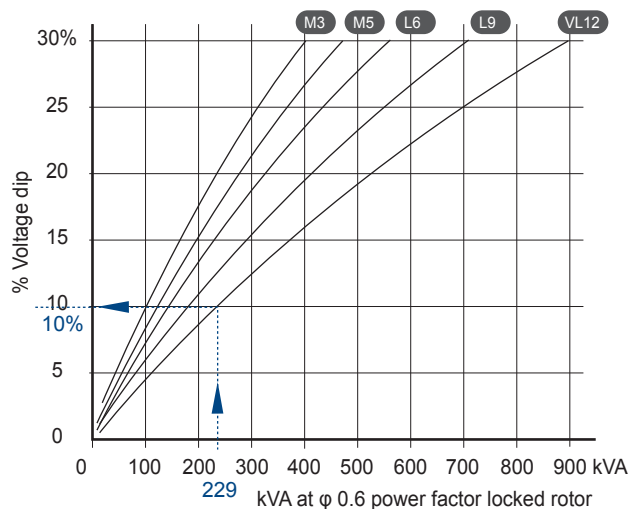

Motor starting (AREP or PMG excitation)

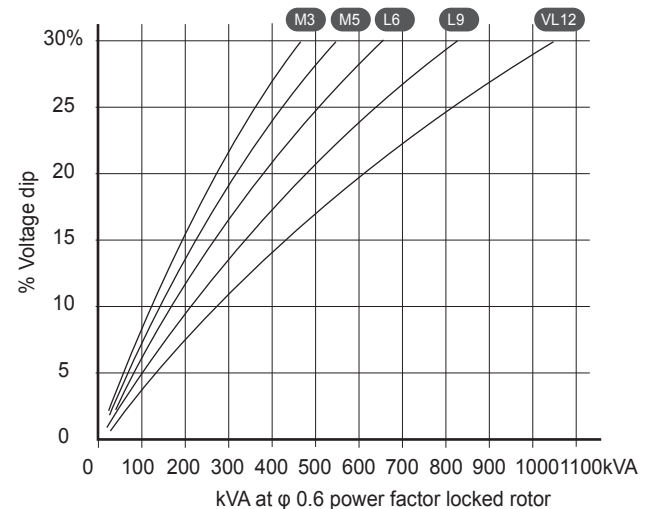

1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.6$

Calculation example for a different P.F. other than 0.6: Starter motor kVA calculated at 0.4 P.F. = 200 kVA




➤ $\text{Sin P.F. } 0.4 = 0.9165$ ➤ $K = 1.145$ ➤ $\text{kVA corrected} = 229 \text{ kVA}$ ➤ $\text{Voltage dip corresponding to VL12} = 10\%$.

2) For voltages other than 480V (Y), 277V (Δ), 240V (YY) at 60 Hz, then kVA must be multiplied by $(480/U)^2$ or $(277/U)^2$ or $(240/U)^2$.

Low Voltage Alternators - 4 pole

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

3-phase short-circuit curves at no load and rated speed (star connection Y)

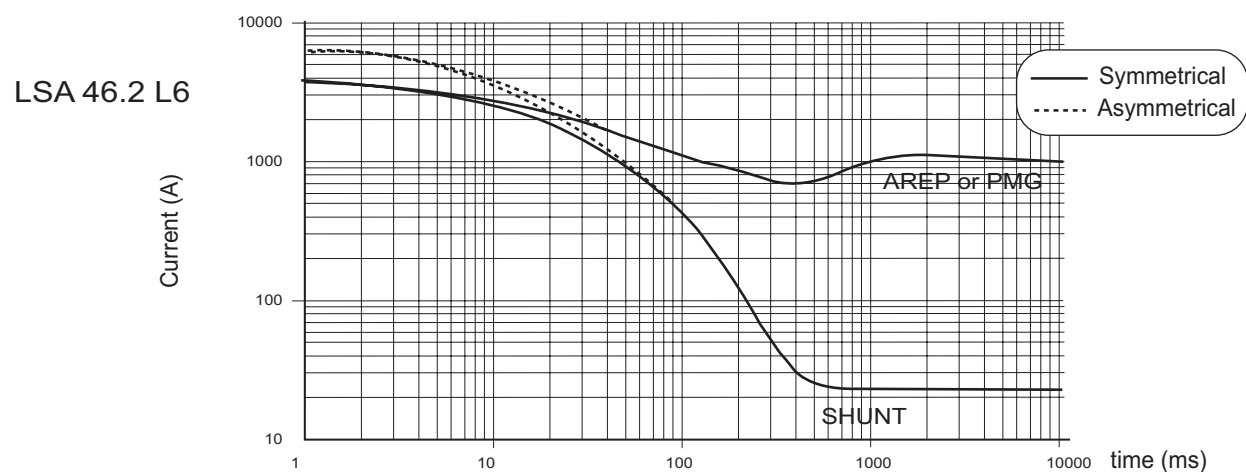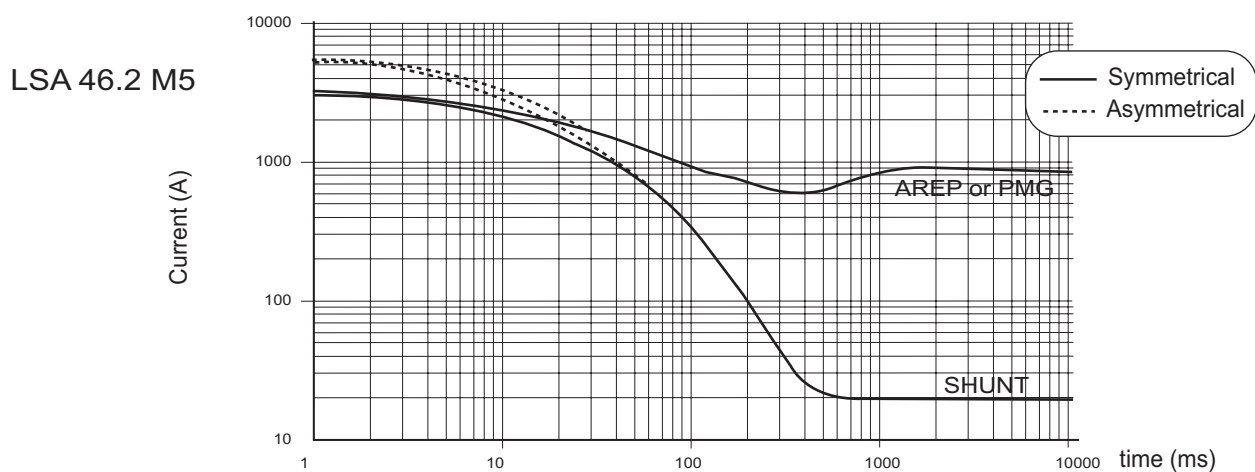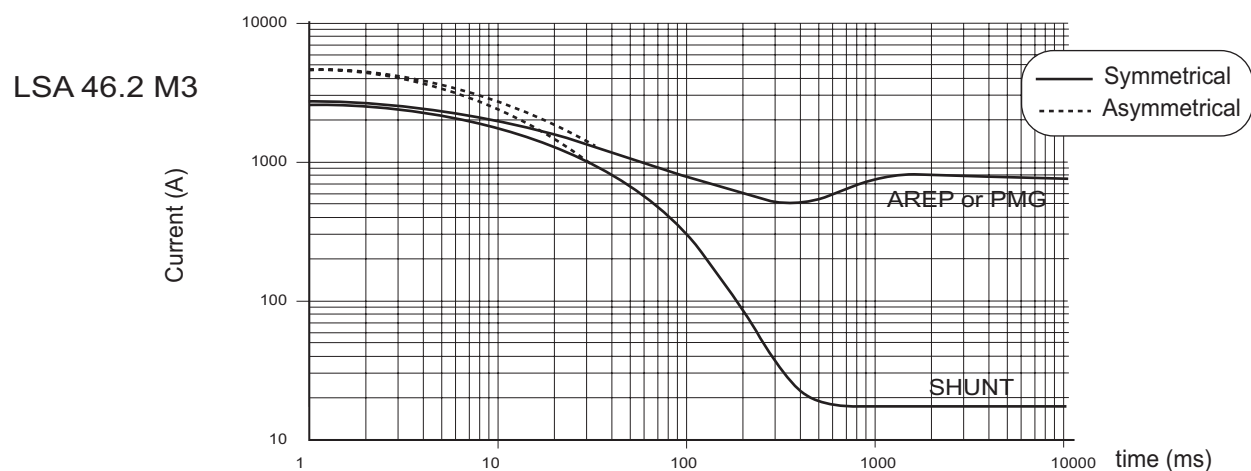

Influence due to connection

Curves shown are for star (Y) connection.



For other connections, use the following multiplication factors:

- Series delta : current value x 1.732 - Parallel star : current value x 2

Low Voltage Alternators - 4 pole

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

3-phase short-circuit curves at no load and rated speed (star connection Y)

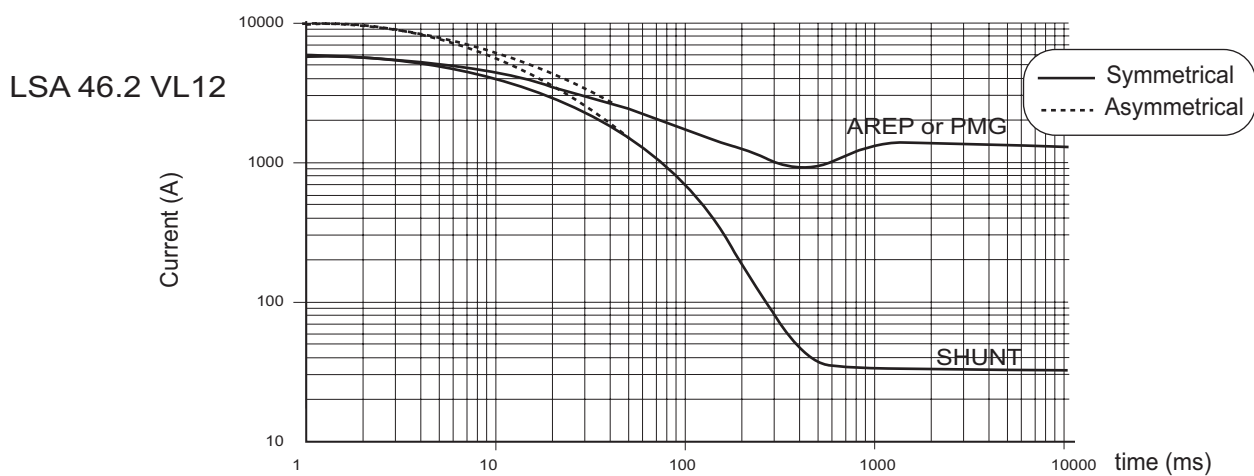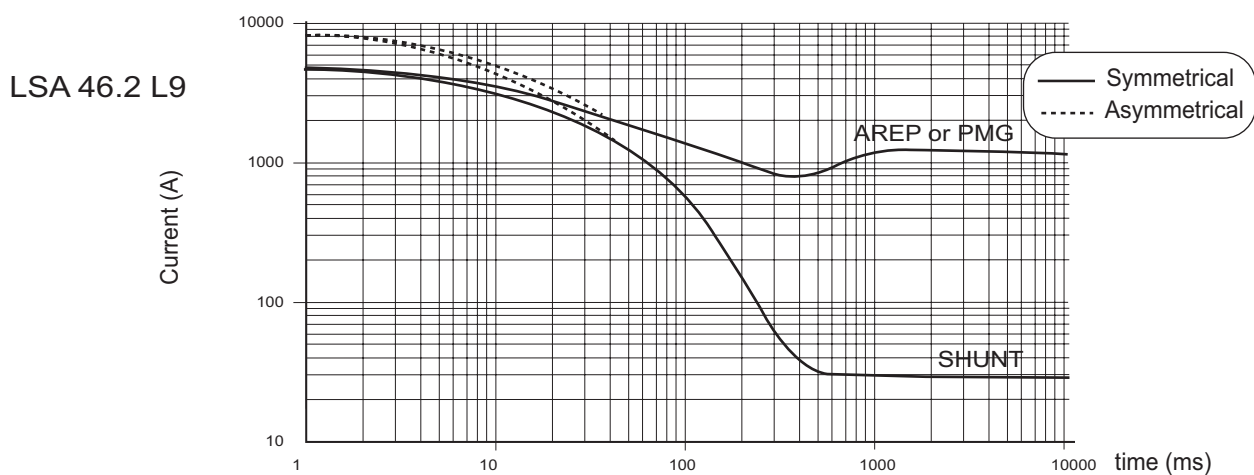

Influence due to short-circuit

Curves are based on a three-phase short-circuit.

For other types of short-circuit, use the following multiplication factors.

	3-phase	2-phase L/L	1-phase L/N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP/PMG)	10 sec.	5 sec.	2 sec.

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

[illegible]

* - dimensions I SA 46 2 M

Technical drawing of a shaft assembly. The drawing shows a shaft with various components mounted on it. Key dimensions are indicated:

- X_r : Distance from the left end to the center of the first large gear.
- L_r : Total length of the shaft.
- Shaft diameters (from left to right): $\varnothing 75$, $\varnothing 100$, $\varnothing 104(46.2 \text{ M})$, $\varnothing 106(46.2 \text{ L})$, $\varnothing 115$, $\varnothing 120$, $\varnothing 115$, $\varnothing 110$, and $\varnothing 75$.
- A cross-section symbol is shown on the shaft between the $\varnothing 106$ and $\varnothing 115$ sections.

NOTE : Dimensions are for information only and may be subject to modifications. Contractuel 2D drawings can be downloaded from the Leroy-Somer site, 3D drawing files are available upon request.

LSA 46.2 - 180 to 315 kVA - 50 Hz / 228 to 381 kVA - 60 Hz

[illegible]

Dimensions (mm) and weight									
Type	L without PMG	LB	P	C	BB	B	R	Xg	Weight (kg)
LSA 46.2 M3	985	880	575	389	418	368	345	400	570
LSA 46.2 M5	985	880	575	389	418	368	345	410	615
LSA 46.2 L6	1095	990	623	389	418	368	368	430	705
LSA 46.2 L9	1095	990	623	389	418	368	368	455	770
LSA 46.2 VL12	1195	1090	623	485	610	560	368	500	885

Technical drawing of a shaft assembly. The drawing shows a shaft with various components and dimensions. Key dimensions include:

- X_r : Distance from the left end to the center of the first bearing.
- L_r : Total length of the shaft.
- 105: Distance from the left end to the center of the first bearing.
- $\varnothing 75$: Diameter of the left end.
- $\varnothing 80$: Diameter of the first bearing housing.
- $\varnothing 92$: Diameter of the second bearing housing.
- $\varnothing 104(46.2 M)$ and $\varnothing 106(46.2 L)$: Diameters of the shaft sections.
- $\varnothing 115$: Diameter of the third bearing housing.
- $\varnothing 120$: Diameter of the fourth bearing housing.
- $\varnothing 115$: Diameter of the fifth bearing housing.
- $\varnothing 110$: Diameter of the sixth bearing housing.
- $\varnothing 75$: Diameter of the right end.

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)				
Type	Xr	Lr	M	J
LSA 46.2 M3	395	955	199.9	1.57
LSA 46.2 M5	404	955	215.8	1.738
LSA 46.2 L6	436	1065	247.6	2.109
LSA 46.2 L9	453	1065	273.7	2.385
LSA 46.2 VL12	502	1165	323.8	2.845

Electric Power Generation

EMERSON. CONSIDER IT SOLVED.™

www.emersonindustrial.com

© Emerson 2014. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Emerson have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 65 800 512 €, RCS Angoulême 338 567 258.

Leroy-Somer™


EMERSON™
Industrial Automation